


"QUALITY PUMPS SINCE 1939"

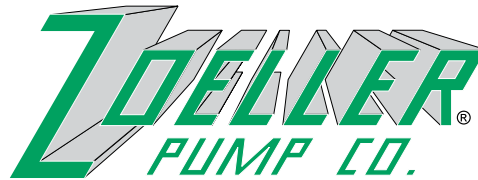

SECTION: 2.10.020

FM0944

0307

Supersedes

0206

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[www.zoeller.com](http://www.zoeller.com)

**COMPARE THESE FEATURES:**

- Use fully or partially submerged.
- Durable polypropylene housing.
- 3-prong power cord, 9 ft. or 20 ft.
- 115 Volt/Single Phase/60 Hz.
- High quality sealed motor.
- Thermal-overload protected motor.
- Model 42 is adaptable for use with standard garden hose (fitting included), 1" NPT pipe, or 1 1/4" slip fit (use discharge hose kit P/N 1010-0117).
- Model 44 is adaptable for use with standard garden hose (fitting included), 1-1/4" Female NPT or 3/4" female NPT adapter.
- Model LM44 with Automatic Operation. Utility applications only.\*
- Model 46 is 2" NPT discharge with 2" hose adapter.
- Screened bottom may be removed to allow easy cleaning.
- Use indoors or outdoors.
- Typical applications: dewatering and filling.
- Oil free (Models 42 and 44 only.)
- Models 42 and 44 remove water from any flat surface down to 1/8"; model 46 will pump down to 1".
- Lightweight and Portable.
- Compact design: Models 42 and 44 will fit in a 7" opening; model 46 will fit in an 8" opening.
- One-year limited warranty.
- Temperature rating 104°F (40°C).
- Nonautomatic - 42, 44 and 46 models.

| Model | HP  | Amps | Max Width | Max Height | Weight   |
|-------|-----|------|-----------|------------|----------|
| 42    | 1/6 | 1.5  | 6         | 9-1/2      | 7.3 lbs. |
| 44    | 1/4 | 2.5  | 6         | 11-3/4     | 7.7 lbs. |
| LM44  | 1/4 | 2.5  | 6         | 11-3/4     | 8.7 lbs. |
| 46    | 1/2 | 6.0  | 8         | 14-1/2     | 16 lbs.  |

**TOTAL DYNAMIC HEAD FLOW PER HOUR**

| MODEL         |        | 42             |        | 44             |        | 46              |        |
|---------------|--------|----------------|--------|----------------|--------|-----------------|--------|
| Feet          | Meters | Gal.           | Liters | Gal.           | Liters | Gal.            | Liters |
| 5             | 1.5    | 900            | 3407   | 1800           | 6813   | 3300            | 12490  |
| 10            | 3.0    | 660            | 2498   | 1320           | 4996   | 2820            | 10670  |
| 15            | 4.6    | 360            | 1363   | 720            | 2725   | 2220            | 8400   |
| 20            | 6.1    | ---            | ---    | ---            | ---    | 1500            | 5680   |
| 30            | 9.1    | ---            | ---    | ---            | ---    | 300             | 1140   |
| Shut-off Head |        | 19 ft. (5.8 m) |        | 20 ft. (6.1 m) |        | 33 ft. (10.1 m) |        |

\*Model LM44 not to be used as a sump pump.

## MODEL 42 - 44 - 46

# FLOOR SUCKER SERIES

## UTILITY PUMPS



**1/6 HP  
Model 42**



Certified to CSA  
Standard C22.2 No. 108



**1/4 HP  
Model 44**



**1/4 HP  
Model LM44  
Automatic**





**1/2 HP  
Model 46**

**USE FLOOR SUCKER SUBMERGED OR ON ANY FLAT SURFACE TO PUMP CLEAR WATER.**