

Cozy

Direct Vent Furnaces

Cozy Comfort...with our Warmest Regards!




CDV15

The Cozy Direct Vent Furnace is the perfect choice for today's zone heating needs. It mounts easily on any outside wall and occupies a minimum of space. The sealed combustion chamber draws air for combustion

from out of doors and exhausts the products of combustion to the outside keeping room air fresh as springtime. The telescoping vent assembly containing air inlet tube, vent tube and cap is included eliminating the need for expensive and difficult-to-install vent pipe systems. A wall mounted thermostat is standard or an optional

built-in bulb stat kit (BBSK) is available. Both provide exact temperature control even if the power fails. All controls include 100% safety pilot and pressure regulator for safe, efficient operation. Contemporary styling in attractive neutral bone finish blends with any decor. The louvered cabinet design maximizes airflow to provide even temperatures from floor to ceiling. Optional automatic blower provides even better air circulation. (fits all units). 81 CFM.

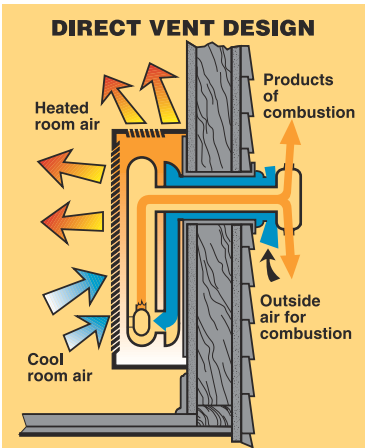

430 Stainless Steel Burner

Cozy's burner design assures quiet ignition, extinction and provides excellent flame characteristics for both natural and propane gas. Burner and control are easily removed for cleaning and service.



LIMITED WARRANTY ON COMBUSTION CHAMBER



Manufacturers of Heating Equipment Since 1888

www.cozyheaters.com

GOZY

Direct Vent Furnaces

Cozy Comfort...with our Warmest Regards!



Vent Cap Assembly

Cozy's simple vent system is provided with each unit and minimizes installation expense by eliminating costly ductwork. Durable constructed of stainless and galvanized steel, the vent assembly is rainproof, prevents back-drafts, provides fresh air for unit combustion (large tube) and exhausts combustion products outside (small tube) the home. The vent cap includes a safety screen to prevent entry by small animals. The standard telescoping vent fits walls 5" to 9" thick. Optional vent extension kits are available - 15" (all models) and 24" (CDV15 & CDV25 only).



Manual Spark Igniter

Convenient push button pilot flame lighter eliminates need for matches or other lighting tools.



Thermostatically Controlled Blower

(DVB-3) installs in minutes inside the cabinet and is prewired to simplify installation. Requires 115 VAC. 81 CFM.



Optional built-in bulb stat kit (BBSK)

Installation Template is packed in each carton to allow convenient location of screw holes, vent opening and gas inlet.



This heater may be installed in an aftermarket permanently located, manufactured home, where not prohibited by local codes.

Specifications

Model No. — Nat. Gas	CDV155	CDV255	CDV335
Model No. — L.P. Gas	CDV156	CDV256	CDV336
Input/Btu/hr.	15,000	25,000	33,000
Control	M. Volt	M. Volt	M. Volt
	Wall Stat	Wall Stat	Wall Stat
Dimensions — (Height width and depth)	29 3/4" H†	31 1/2" H††	31 1/2" H††
	18" W	34 1/2" W	34 1/2" W
	9 3/4" D	9 3/4" D	9 3/4" D
Gas Inlet Size	1/2"	1/2"	1/2"
Vent Size	9"	9"	9"
Center of horizontal vent to floor	22"	24 1/8"	24 1/8"
Optional Equipment	VK1525/9"-15"	VK1525/9"-15"	VK33/9"-15"
	VK1525/15"-24"	VK1525/15"-24"	N/A
	Fan DVB-3**	Fan DVB-3**	Fan DVB-3**
	BBSK	BBSK	BBSK
Approx. Ship Wt.	65 lbs.	99 lbs.	99 lbs.

† Includes 1/2" floor Clearance †† Includes 4" floor Clearance *Wall Opening **Weight 4 lbs.

